

Ultra High-Speed Photoreceiver with InGaAs-PIN Photodiode



The picture shows the HSA-X-S-2G-IN-FS with free space input. The photoreceiver will be delivered without post holder and post.

Features	<ul style="list-style-type: none"> • Bandwidth 10 kHz ... 2 GHz • InGaAs-PIN detector • Spectral range 900 ... 1700 nm • Amplifier transimpedance (gain) 5×10^3 V/A • Conversion gain 4.75×10^3 V/W @ 1550 nm 																																	
Applications	<ul style="list-style-type: none"> • Spectroscopy • Ultra-fast pulse and transient measurements • Optical triggering • Optical front-end for oscilloscopes and ultra-fast A/D converters 																																	
Specifications	<table border="0"> <tr> <td>Test conditions</td> <td colspan="2">$V_s = +15$ V, $T_A = 25$ °C, system impedance = 50 Ω</td> </tr> <tr> <td>Gain</td> <td>Amplifier transimpedance</td> <td>5×10^3 V/A (@ 50 Ω load)</td> </tr> <tr> <td></td> <td>Conversion gain</td> <td>4.75×10^3 V/W (typ. @ 1550 nm)</td> </tr> <tr> <td>Frequency Response</td> <td>Lower cut-off frequency (-3 dB)</td> <td>10 kHz</td> </tr> <tr> <td></td> <td>Upper cut-off frequency (-3 dB)</td> <td>2 GHz (± 15 %)</td> </tr> <tr> <td></td> <td>Rise/fall time (10 % - 90 %)</td> <td>180 ps (± 15 %)</td> </tr> <tr> <td>Input/Detector</td> <td>Detector material</td> <td>InGaAs-PIN photodiode</td> </tr> <tr> <td></td> <td>Active area</td> <td>FS-version: \varnothing 100 μm FC-version: integrated ball lens, suitable for fibers up to 62.5 μm core diameter</td> </tr> <tr> <td></td> <td>Spectral range</td> <td>900 ... 1700 nm</td> </tr> <tr> <td></td> <td>Max. optical peak input power</td> <td>200 μW AC (for linear amplification, @ 1550 nm) 10 mW CW (to prevent saturation, @ 1550 nm)</td> </tr> <tr> <td>Noise</td> <td>NEP</td> <td>16 pW/\sqrtHz (@ 1550 nm, 100 MHz)</td> </tr> </table>	Test conditions	$V_s = +15$ V, $T_A = 25$ °C, system impedance = 50 Ω		Gain	Amplifier transimpedance	5×10^3 V/A (@ 50 Ω load)		Conversion gain	4.75×10^3 V/W (typ. @ 1550 nm)	Frequency Response	Lower cut-off frequency (-3 dB)	10 kHz		Upper cut-off frequency (-3 dB)	2 GHz (± 15 %)		Rise/fall time (10 % - 90 %)	180 ps (± 15 %)	Input/Detector	Detector material	InGaAs-PIN photodiode		Active area	FS-version: \varnothing 100 μ m FC-version: integrated ball lens, suitable for fibers up to 62.5 μ m core diameter		Spectral range	900 ... 1700 nm		Max. optical peak input power	200 μ W AC (for linear amplification, @ 1550 nm) 10 mW CW (to prevent saturation, @ 1550 nm)	Noise	NEP	16 pW/ \sqrt Hz (@ 1550 nm, 100 MHz)
Test conditions	$V_s = +15$ V, $T_A = 25$ °C, system impedance = 50 Ω																																	
Gain	Amplifier transimpedance	5×10^3 V/A (@ 50 Ω load)																																
	Conversion gain	4.75×10^3 V/W (typ. @ 1550 nm)																																
Frequency Response	Lower cut-off frequency (-3 dB)	10 kHz																																
	Upper cut-off frequency (-3 dB)	2 GHz (± 15 %)																																
	Rise/fall time (10 % - 90 %)	180 ps (± 15 %)																																
Input/Detector	Detector material	InGaAs-PIN photodiode																																
	Active area	FS-version: \varnothing 100 μ m FC-version: integrated ball lens, suitable for fibers up to 62.5 μ m core diameter																																
	Spectral range	900 ... 1700 nm																																
	Max. optical peak input power	200 μ W AC (for linear amplification, @ 1550 nm) 10 mW CW (to prevent saturation, @ 1550 nm)																																
Noise	NEP	16 pW/ \sqrt Hz (@ 1550 nm, 100 MHz)																																

Ultra High-Speed Photoreceiver with InGaAs-PIN Photodiode

Specifications (continued)


Output	Output impedance 50 Ω (designed for 50 Ω load) Output VSWR 2.5 : 1 (@ f < 2.5 GHz) Output return loss 7.3 dB (@ f < 2.5 GHz) Max. output voltage 1.9 V _{PP} (@ 50 Ω load, for linear amplification) Output noise typ. 3.6 mV _{RMS} or 24 mV _{PP} * (measurement BW: 4 GHz)
Power Supply	Supply voltage +15 V, 130 mA typ. (depends on operating conditions, recommended power supply capability minimum 200 mA)
Case	Weight 100 g (0.23 lbs) Material AlMg4.5Mn, nickel-plated
Temperature Range	Storage temperature -40 ... +100 °C Operating temperature 0 ... +60 °C

* The peak-to-peak output noise is derived from the RMS noise as follows: $V_{PP} = V_{RMS} \times 6.6$ (99.9% of the time the output noise voltage will be within the specified peak-to-peak value.)

Absolute Maximum Ratings


Power supply voltage	±20 V
Optical input power	12 mW (averaged)

Spectral Response

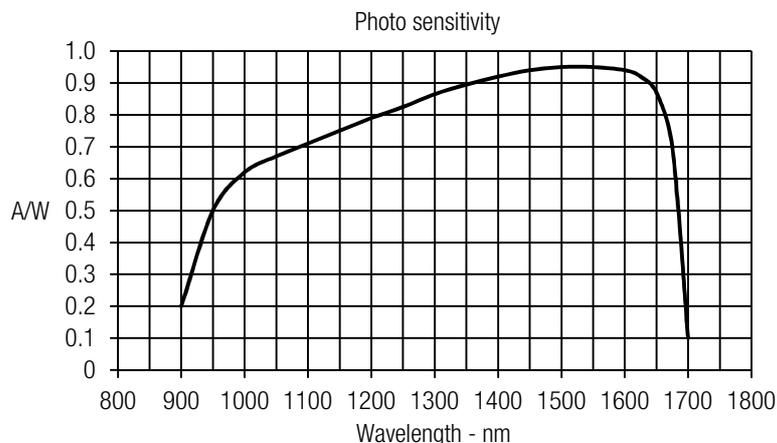

Connectors

Input	HSA-X-S-2G-IN-FS 25 mm round flange for free space applications HSA-X-S-2G-IN-FC FC fiber optic receptacle
Output	SMA jack (female)
Power supply	Lemo® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52) Pin 1: +15 V Pin 2: NC Pin 3: GND



Ultra High-Speed Photoreceiver with InGaAs-PIN Photodiode

Available Models	HSA-X-S-2G-IN-FS HSA-X-S-2G-IN-FC HSA-X-S	free space input fiber optic receptacle customized versions available on request
------------------	---	--

Dimensions	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>HSA-X-S-2G-IN-FS</p> </div> <div style="text-align: center;"> <p>HSA-X-S-2G-IN-FC</p> </div> </div> <p style="text-align: right; margin-top: 10px;">All measures in mm unless otherwise noted.</p>	
------------	---	--

FEMTO Messtechnik GmbH
 Klosterstr. 64
 10179 Berlin · Germany
 Phone: +49 30 280 4711-0
 Fax: +49 30 280 4711-11
 Email: info@femto.de
 www.femto.de

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany